



BuzziJet 120v Product Specification Sheet

This document contains technical
information about the BuzziJet



www.buzzi.space

Powerful acoustic circle of light

Form follows function with BuzziJet, an intentionally simple design based on the principles of geometric acoustics. Wide in diameter, this cylindrical design allows sound waves to bounce back-and-forth within the radius of its circular body, and in turn mitigates noise. BuzziJet is considerable in size, yet appears lightweight and airy thanks to its upholstered foam core. Its soft presence evokes a majestic sense of serenity. Concealed inside the body, a powerful light source emits warm, pleasant light.

Design by BuzziSpace Studio

General

-  Ceiling Suspended
S | M
-  Upholstered acoustic foam shade
LED disk with opaque diffusor
Powder coated metal ceiling canopy in white (RAL 9010)
Transparent power cable
-  Wattage: 29 W
Input Voltage: 120-277V
Input Frequency: 50/60 Hz
Lumen Output: 2545 lumen
Color Temperature: 3000 K
Color Rendering Index: >90
Dimmable: 1-10 V Protocol
Unified Glare Rating: 22
-  IP20 Dry Usage
-  Assembled
-  If installing on suspended ceiling, verify load capacity prior to installation

Certifications

cULus Listed

Acoustics



Absorption



Diffusion



Low tone



Mid tone




High tone

Content

Configurations	3	Fabrics	6
Composition	4	Dimensions	9
Mounting	5	Acoustics	11


Configurations

BuzziJet S

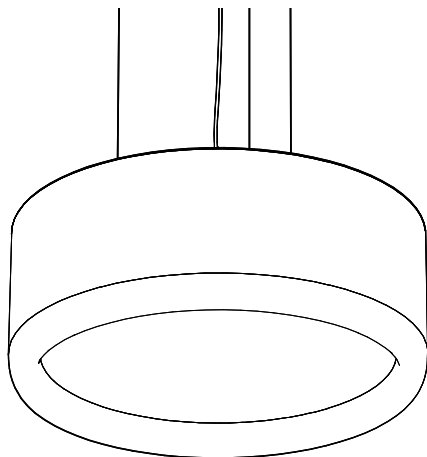

- 🔖 Ceiling Suspended
 - Upholstered acoustic foam shade
 - LED disk with opaque diffuser
- 🌲 Powder coated metal ceiling canopy and frame in white (RAL 9010)
- 🔌 Transparent power cable
- ✂ S: Ø 31.50" H: 8.86"
- ⚖ 29.76 lbs
- 🔧 Ceiling Suspended Straight or Split
 - Fixing System Screw
 - 3x black or alu cables 78.74" - 157.48"
- ⚠ If installing on suspended ceiling, verify load capacity prior to installation

BuzziJet M

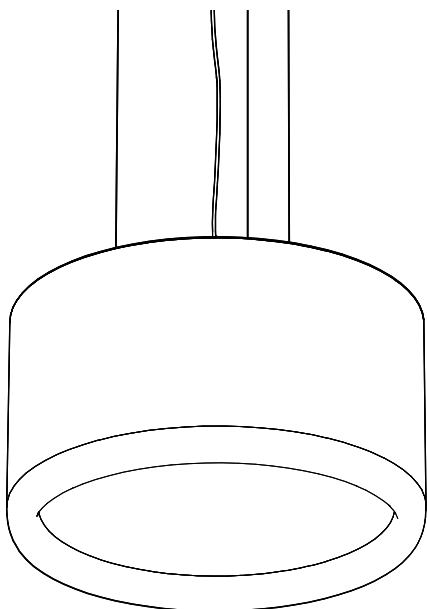

- 🔖 Ceiling Suspended
 - Acoustic upholstered foam shade
 - LED disk with opaque diffuser
- 🌲 Powder coated metal ceiling canopy and frame in white (RAL 9010)
- 🔌 Transparant power cable
- ✂ M: Ø 31.50" H: 17.72"
- ⚖ 33.07 lbs
- 🔧 Ceiling Suspended Straight or Split
 - Fixing System Screw
 - 3x black or alu cables 78.74" - 157.48"
- ⚠ If installing on suspended ceiling, verify load capacity prior to installation

Composition





Light source





The Light source is wrapped with an upholstered ring in the same fabric as the foam shade.

The PMMA diffuser ensures an optimal light spread and efficiency. It creates a very diffuse light surface without any dottiness. The light source of the BuzziJet is a LED PCB, containing 36 low power LED's.

To enlight your workplace or room with optimal lux levels take following measures into account.



To ensure a continuous light spread into account take following distances inbetween the BuzziJets

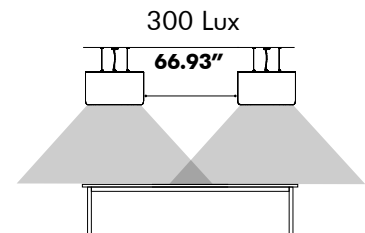

According to EN12464

Ceiling canopy and power cord





Suspension set consists of a:

- metal ceiling canopy powder coated in white
- transparent power cable (length 157.48")
- separate metal cables to suspend the BuzziJet (in alu or black 78.74" or 157.48")




Mounting

Ceiling Suspended Straight

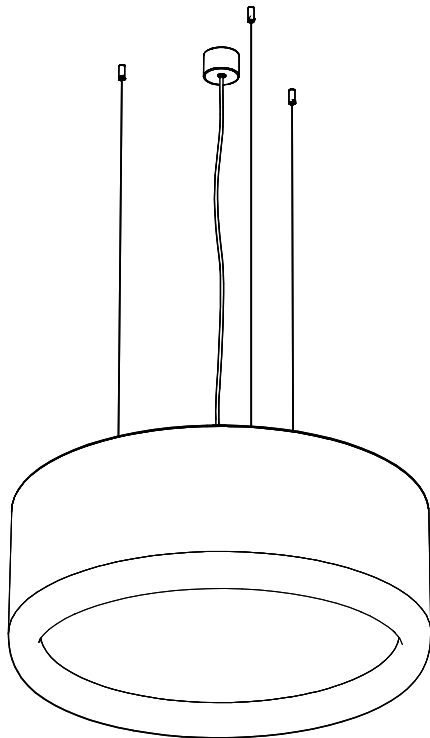

Ceiling Suspended Straight
Fixing System Screw with 3 cables of
78.74" or 157.48"
(black or alu)
Min. distance of shade to ceiling is 3.94"


Ceiling Suspended Split

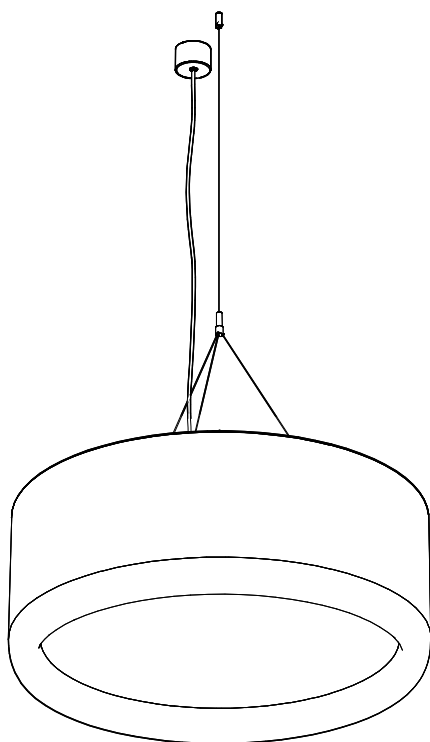

Ceiling Suspended Split
Fixing System Screw with 3 split cables and 1 main
cable, total length of 78.74" or 157.48" (black or alu)
Min. distance of shade to ceiling is 19.69"

Fabrics

Fabric

**Category A**

Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics

Weight 405 g/m² | 11.94 oz/yd²

Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek

Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A

Fastness to light EU: 4 | USA 4

Fastness to rubbing EU: Wet 3-4 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Rough

**Category A**

Composition 100% Polyacryl

Weight 456 g/m² | 13.45 oz/yd²

Abrasion resistance 40.000 Martindale


Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette)
USA: CAL TB TB 117

Fastness to light EU: 5

Fastness to rubbing EU: Wet: 3 | Dry: 3



Trevira CS+ | CS

**Category A**

Weight 420 g/m² | 12.39 oz/yd²

Composition 100% Polyester, Trevira CS

Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek

Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |
IMO Res. A652 (16)

Fastness to light EU: 6 | USA 5


Fastness to rubbing EU: Wet 4-5 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Revive 1

kvadrat

**Category A**

Composition 100% recycled polyester FR

Weight 430 g/lin.m

Abrasion resistance 60.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
UNI 9175 1IM | US Cal. Tech. Bull. 117
IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 5, wet 4-5

Pilling Note 4-5, EN ISO 12945



Revive 2

kvadrat



Category A

Composition 100% recycled polyester FR

Weight 420 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
UNI 9175 1IM | US Cal. Tech. Bull. 117
IMO A.652 (16)


Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 5, wet 4-5

Pilling Note 4-5, EN ISO 12945



Terra



Category B

Composition 100% Pure New Wool

Weight 370 g/m² | 10.91 oz/yd²

Abrasion resistance 40.000 Martindale, 25,000 Wyzenbeek

Flammability EU: BS5852 CRIB 5 | BS5867 PART 2 : 2008 : TYPE B
EN: 1021.2/2006 | USA: CAL TB 117

Fastness to light EU 5 | USA 5


Fastness to rubbing EU: Wet 4 | Dry 4

Fastness to crocking USA: Wet 4 | Dry 4



Clara 2

kvadrat



Category B

Composition 92% new wool, 8% nylon

Weight 400 g/lin.m

Abrasion resistance 80.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2
NF D 60 013 | UNI 9175 1IM | US Cal. Tech. Bull. 117, Sec. E
NFPA 260 | IMO A.652(16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Remix 2

kvadrat



Category B

Composition 90% new wool, 10% nylon

Weight 415 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1
Önorm B1/Q1 | NF D 60 013 | UNI 9175, 1IM
AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013
NFPA 260 | IMO FTP Code 2010:Part 8

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Hero

kvadrat




Category C
Composition 96% new wool, 4% nylon
Weight 580 g/lin.m
Abrasion resistance 45.000 Martindale rubs, EN ISO 12947
Flammability EN 1021-1/2 | DIN 4102 B2 | NF D 60 013
UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260
IMO A.652 (16)
Fastness to light Note 5-6, ISO 105-B02
Fastness to rubbing (ISO) dry 4-5, wet 4-5
Pilling Note 3-4, EN ISO 12945



Tonus 4

kvadrat




Category D
Composition 90% new wool, 10% Helanca
Weight 665 g/lin.m
Abrasion resistance 100.000 Martindale rubs, EN ISO 12947
Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2
Önorm B1/Q1 | NF D 60 013 | UNI 9175 1IM
US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)
Fastness to light Note 5-7, ISO 105-B02
Fastness to rubbing (ISO) dry 3-5, wet 3-5
Pilling Note 3, EN ISO 12945



Memory 2

kvadrat




Category E
Composition 100% Trevira CS
Weight 700 g/lin.m
Abrasion resistance 35.000 rubs acc. to the Martindale method, EN ISO 12947
Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
NF D 60 013 | NF P 92 507 M1 | UNI 9175 1IM
UNI 9177 classe 1 | US Cal. Tech. Bull. 117
IMO A.652 (16)
Fastness to light Note 5-8, ISO 105-B02
Fastness to rubbing (ISO) dry 4-5, wet 4-5
Pilling Note 4, EN ISO 12945





Dimensions

BuzziJet S

Straight

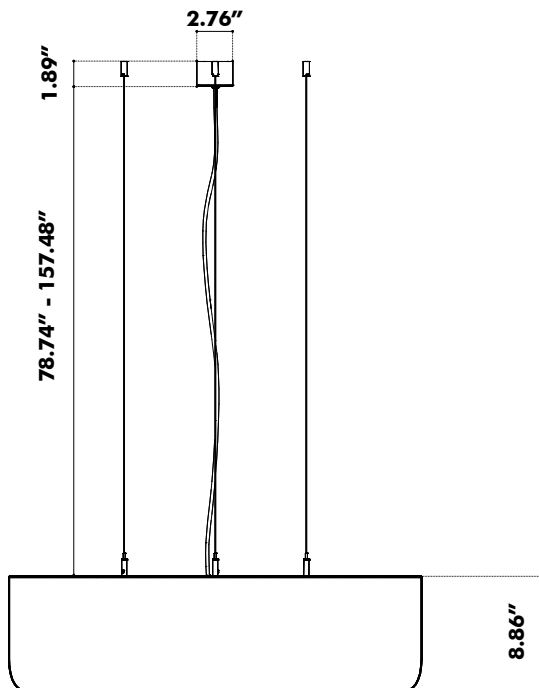


Split

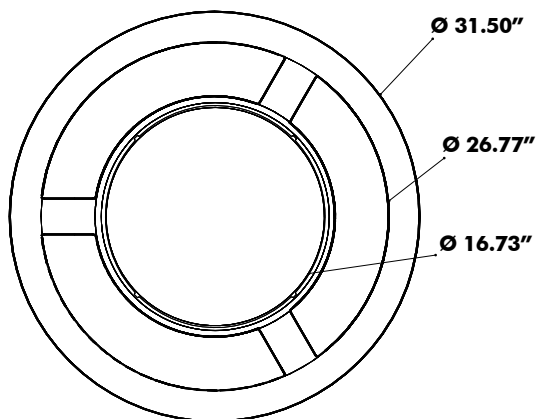
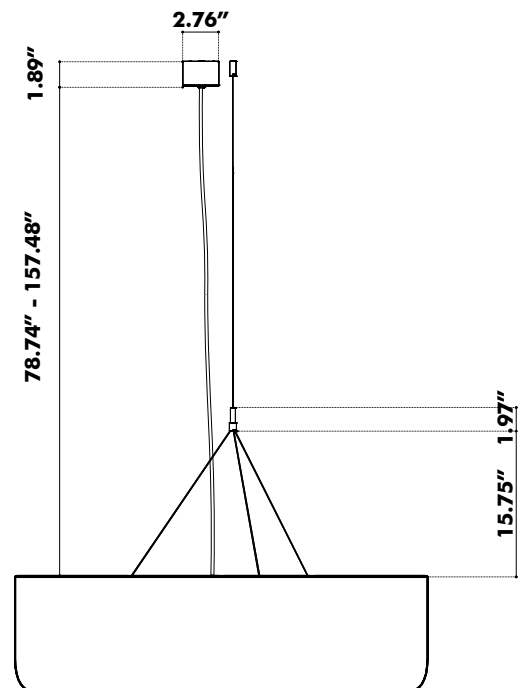


BuzziJet M

Straight

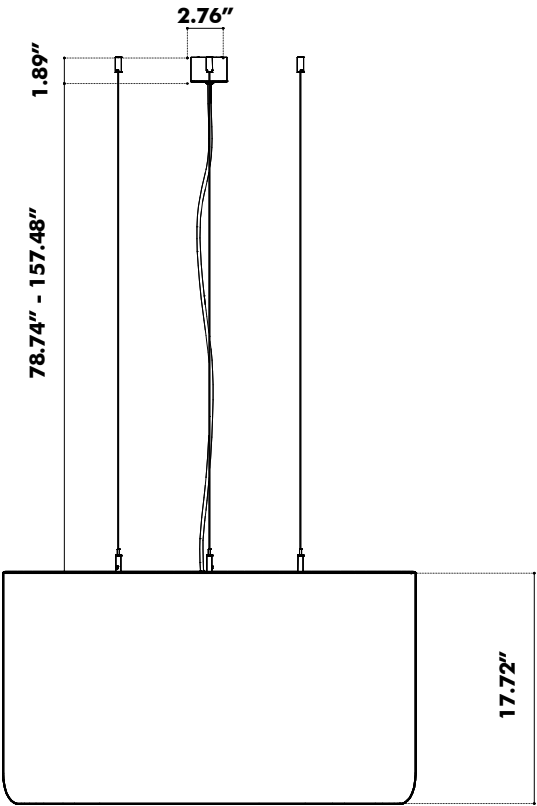


Split

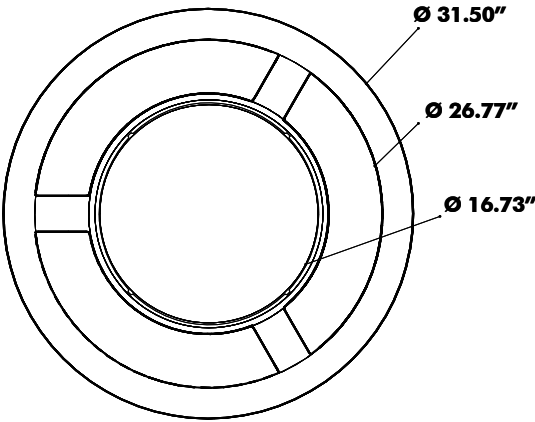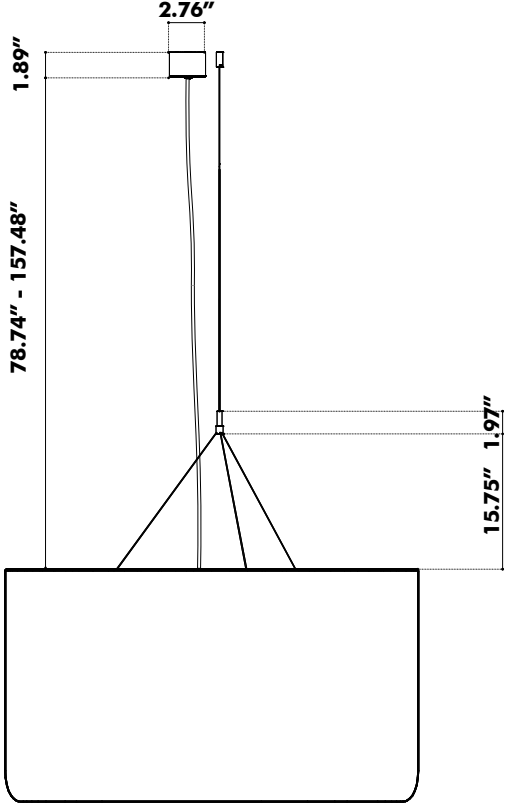

Acoustics

BuzziJet

Equivalent sound absorption area in m² per object

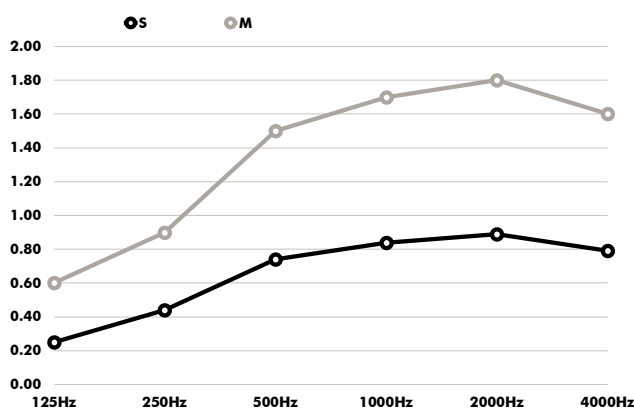

Hz	S Aeq/m ²	M Aeq/m ²
125	0.25	0.60
250	0.44	0.90
500	0.74	1.50
1000	0.84	1.70
2000	0.89	1.80
4000	0.79	1.60